


European Version UFO High Bay E Series


135lm/W



- Light Efficacy up to 135lm/W
- Input Voltage: 100-240VAC.
- 5 & 7 years warranty.
- Option: Non-Dimming,
Dimming(0/1-10V/DALI) ,
Microwave
ZigBee.




Specifications


	Watt (W)	Certification Type	Light Efficiency (lm/W)	Input	Product Size(mm)	Driver Brand
	200	CE/ROHS	135	AC100-240V 50/60Hz	ø330*H150	ZHIHE
LED Chip Brand	PF	Beam Angle	CRI (Ra)	Dimmable Sensor	Working Temperature	Storing Temperature
PHILIPS	0.95	110°	70	No Dimmable 0/1-10V DALI Microwave ZigBee	-30℃ ~ +50℃	-30℃ ~ +80℃



Dimension

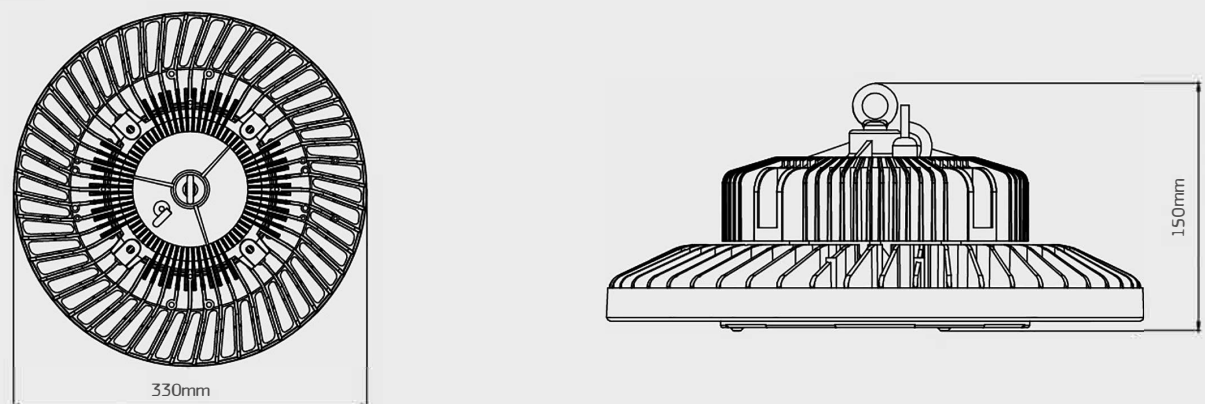


Distribute curve and illuminance distribute curve

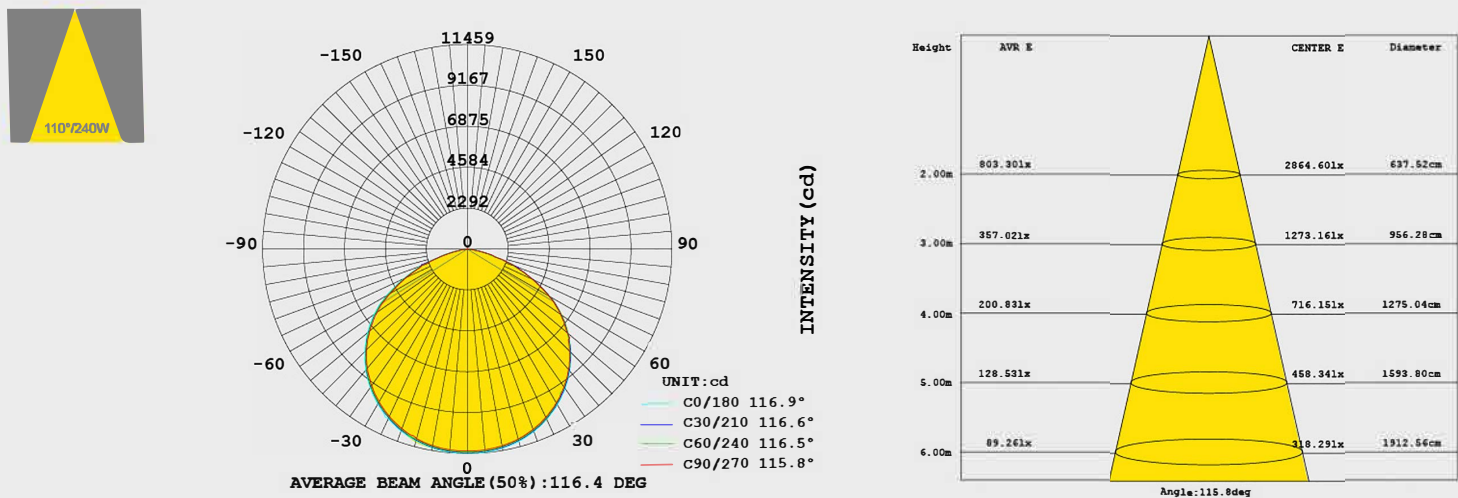


Accessories

	OHD-PUE-AR Aluminum reflector 45°/60°/90°		OHD-PUE-PR PC reflector 60°/90°/120°		OHD-PUE-FG Frost glass T=3.8mm Tempered
	OHD-PUE-PRC01 PC reflector cover (Tapered bottom cover)		OHD-PUE-PRC02 PC reflector cover (Conical Gloss Bottom Cover)		OHD-PUE-TG high definition Tempered glass
	OHD-PA-RB01 Rotatable bracket		OHD-PU-NRB01 Non-Rotatable bracket		OHD-PA-SC Suspension chains
	OHD-PA-WC2 Waterproof connect+2m cable		OHD-PA-WC5 Waterproof connect+5m cable		OHD-PU-SR01 Safety rope

Installation guide

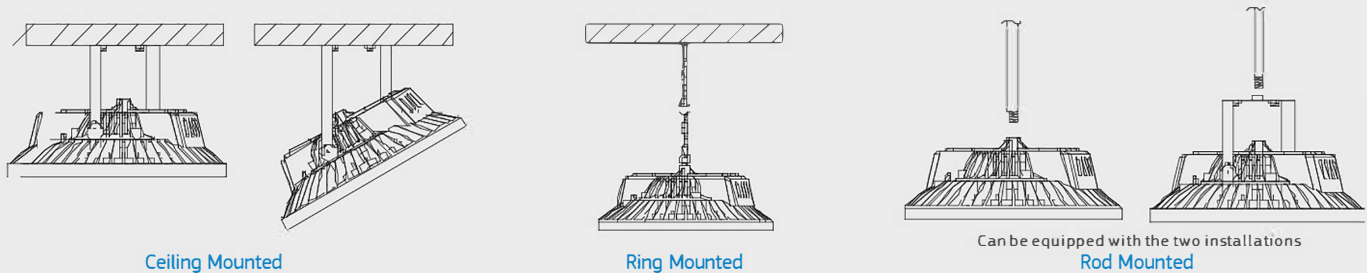

Thermal Distribution

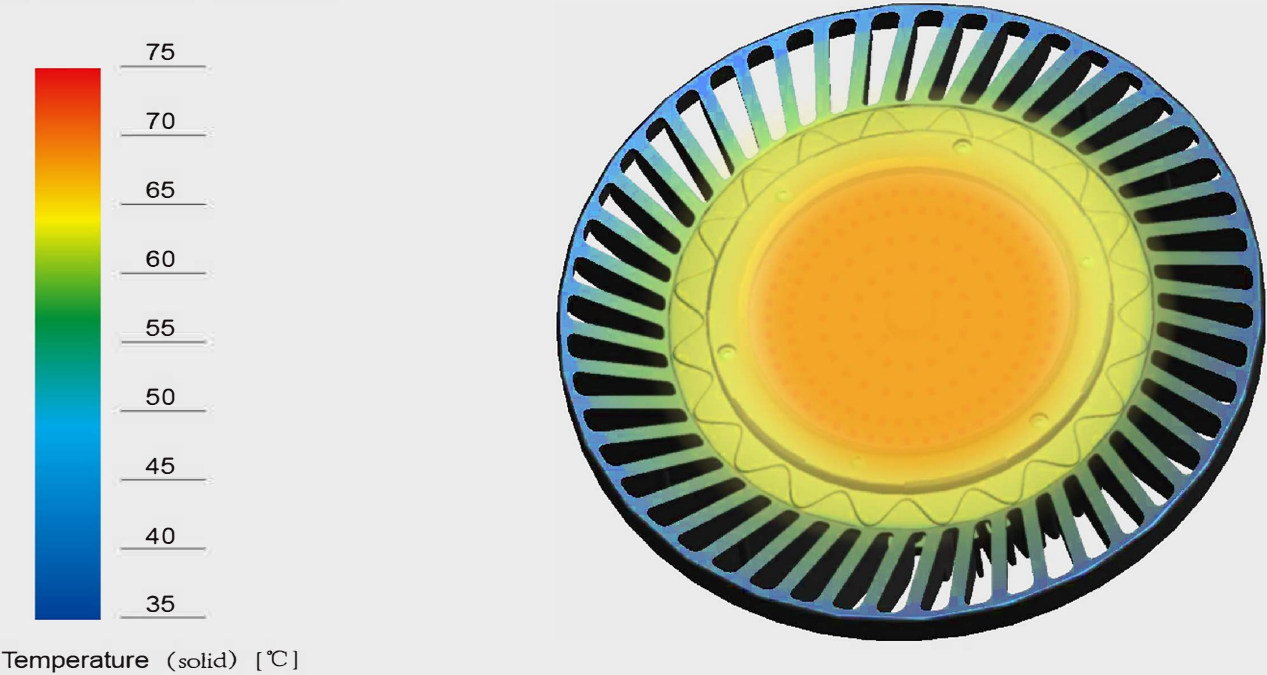

Packaging

	Unit Net Weight	Qty/Ctn	Carton Gross Weight	Carton Size
HBUFO-E-200W	4.65kg	1pcs	5.5kg	L385*W385*180mm

	CBM(m³)	Product Qty (pcs/20GP) Carton shipment	Product Qty (pcs/40GP) Carton shipment
HBUFO-E-200W	0.0267	1000	2000